

Precision machining
Simple assembly
Top visual quality



Perfectly
precise joint

NOVATOP EASY
Spring & groove + chamfered edge

NOVATOP EASY

3-layer panel

Spring & groove + chamfered edge

Machining: Spring & groove + chamfered edge (4 sides)

Wood: Spruce

Standard thickness (mm): 19, 27

Netto format (mm): **Gross:** 690 x 2500, 625 x 2500,

Net: 680 x 2490, 615 x 2490

Quality: B/C, C/C, C/D

Packaging: 48 or 32 pcs

Application: Interior, exterior



Precision machining:

Machining tolerance in the thickness of ± 0.4 mm

Width and length tolerance ± 0.5 mm


Tolerance of sanding thickness ± 0.2 mm

Surface finishes and other machining according to the individual demand.

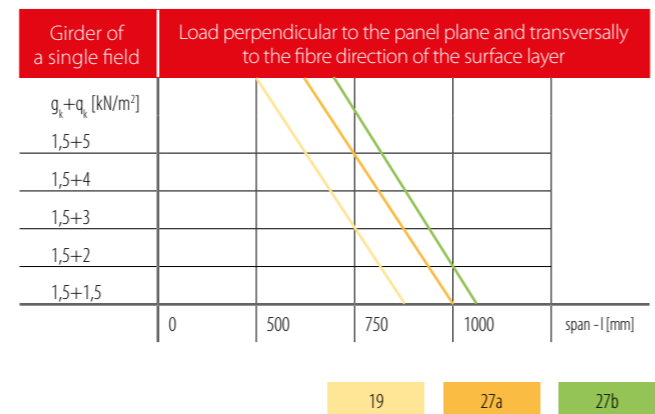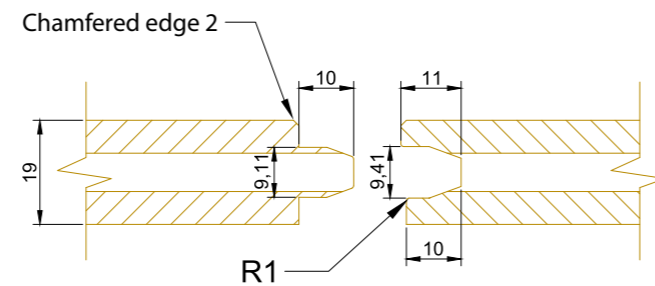



Archifabrika s.r.o. CZ

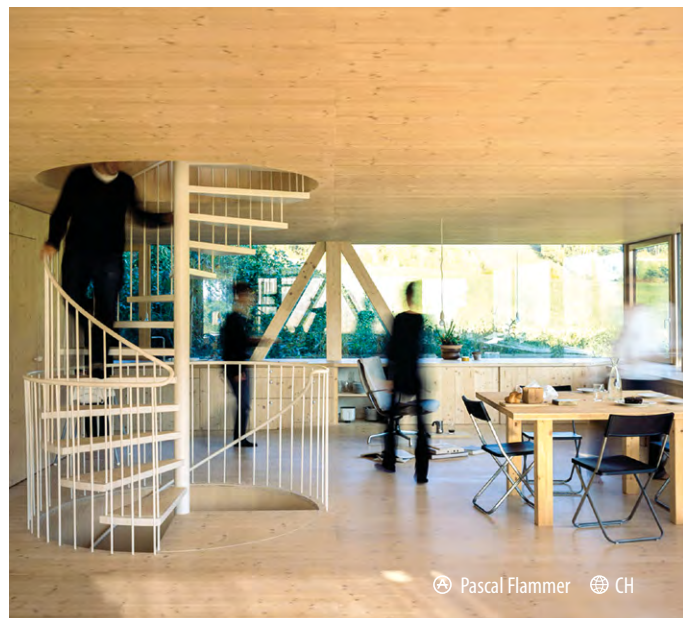

Pascal Flammer CH



Casa-Vita / Frefel Holzbau AG CH



Klar CZ

Manufacturer: AGROP NOVA a.s.
 Ptenský Dvorek 99 • 798 43 Ptení • Czech Republic
 tel.: +420 777 011 651 • novatop-swp@agrop.cz

Certificates:



Information



Reference



Download



novatop-swp.com

V: 04/23